

Extension or Straight Ladder Inspection Form




Date: _____ Employee Conducting the Inspection: _____


Ladder ID #: _____ Department: _____

OSHA requires (29 CFR 1910.23(b)(9)) all ladders are to be visually inspected prior to their first use in a work shift and more frequently as necessary. In addition to those inspections, it is recommended that all ladders are visually inspected using this form as guidance at least annually. If you answer "no" to any question below, tag the ladder and remove it from service.

Inspection		YES	NO	N/A
1.	Are all labels present and legible?			
2.	Are the rails in good condition free from any cracks, bends, dents or other damage?			
3.	Are all of the rungs present, secure, in good condition and free from any damage?			
4.	Are the rung locks operational and seat properly when extended?			
5.	Is the rope in good condition, free from any fraying or rot?			
6.	Is the pulley operational and in good condition?			
7.	Are the feet present, in good condition and free from any damage or defects?			
8.	Is the ladder free from any grease, oil or other slippery substance?			
9.	Is the ladder free from paint or other substances that would prevent you from inspecting the ladder?			
10.	Is the ladder free from any significant rust, corrosion or loose or damaged parts?			

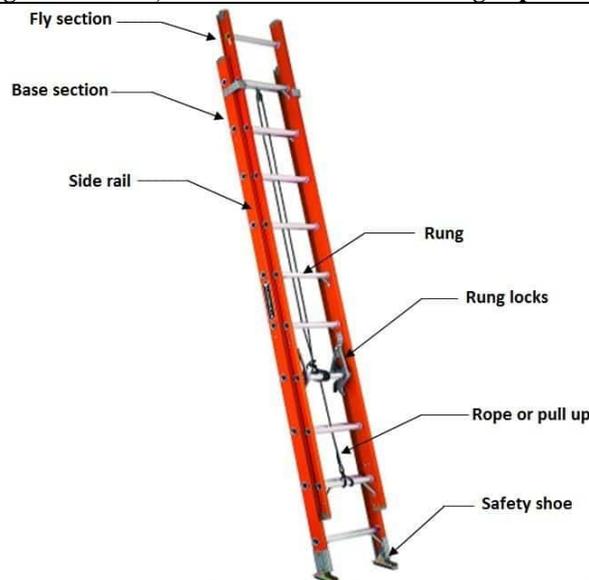

Rung Lock Assembly

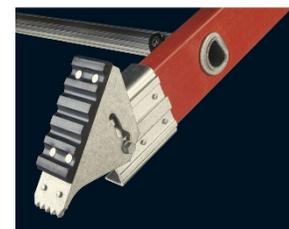

Safety Shoe/Foot Pad